

FABL2430 | 1W~9 W | Weight: 50g (APPROX)


Rated Voltage from 6V to 30VDC, Speed, torque, etc. free customization.

·典型应用 Typical Use


个人护理(Personal Care)
家用电器(Home Application)
电动工具(Power Tools)
商业设备(Business Equipment)
医疗器械(Medical Apparatus)

·连接端口 Connector Interface

Number	Function
1	VCC
2	FG
3	CW/CCW
4	GND
5	PWM

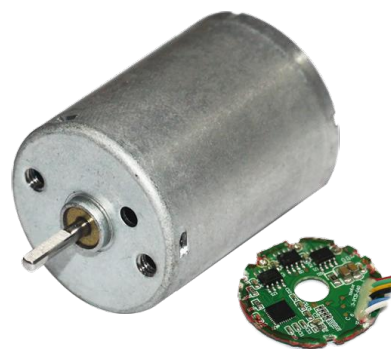

DIRECTION OF ROTATION

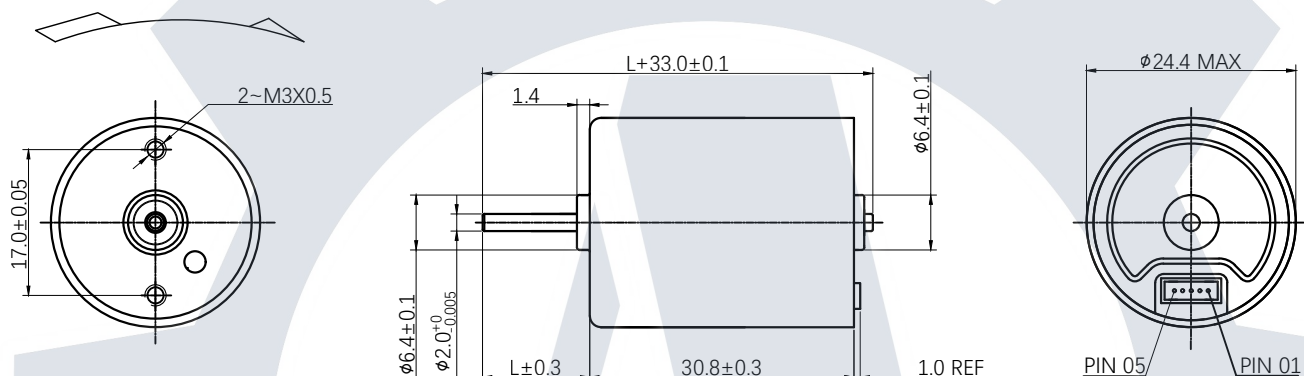

Shaft Length "L" can be customized charge-free, shaft shape can be also customized accordingly.

UNIT:MM

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL	
	OPERATING RANGE	RATED	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	TORQUE	CURRENT
			r/min	A	r/min	A	g. cm	W	g. cm	A
FABL2430-V1	5V~12V	9V	6086	0.13	4747	0.442	48.7	2.371	221.3	1.546
FABL2430-V2	8V~16V	12V	7380	0.12	5830	0.438	53.1	3.174	252.7	1.636
FABL2430-V3	8V~26V	24V	9737	0.09	7692	0.369	68.1	5.37	324.1	1.322

