

# FABL2847 | 5W~30 W | Weight: 116g (APPROX)

Rated Voltage from 6V to 30VDC, Speed, torque, etc. free customization.

## ·典型应用 Typical Use




|                          |
|--------------------------|
| 个人护理(Personal Care)      |
| 家用电器(Home Application)   |
| 电动工具(Power Tools)        |
| 商业设备(Business Equipment) |
| 医疗器械(Medical Apparatus)  |

## ·连接端口 Connector Interface

| Number | Function |
|--------|----------|
| 1      | VCC      |
| 2      | FG       |
| 3      | CW/CCW   |
| 4      | GND      |
| 5      | PWM      |



## DIRECTION OF ROTATION

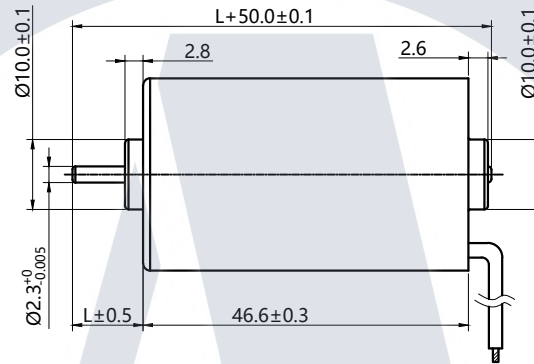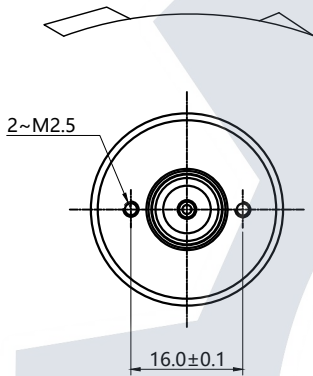


Shaft Length "L" can be customized charge-free, shaft shape can be also customized accordingly.

UNIT:MM

| MODEL       | VOLTAGE       |       | NO-LOAD  |         | AT MAX EFFICIENCY |         |        |        | STALL   |         |
|-------------|---------------|-------|----------|---------|-------------------|---------|--------|--------|---------|---------|
|             | OPERATE RANGE | RATED | SPEED    | CURRENT | SPEED             | CURRENT | TORQUE | OUTPUT | TORQUE  | CURRENT |
|             |               |       | r/m      | A       | r/m               | A       | g.cm   | w      | g.cm    | A       |
| FABL2847-V1 | 6 ~ 12        | 12    | 7170     | 0.17    | 6095              | 0.90    | 122.20 | 7.64   | 814.80  | 5.06    |
| FABL2847-V2 | 8 ~ 26        | 18    | 10833.00 | 0.20    | 9100              | 1.09    | 147.90 | 13.81  | 924.30  | 5.75    |
| FABL2847-V3 | 8 ~ 26        | 24    | 12370    | 0.21    | 10391             | 1.11    | 173.60 | 18.50  | 1085.10 | 5.85    |

FABL2847-V1 12V

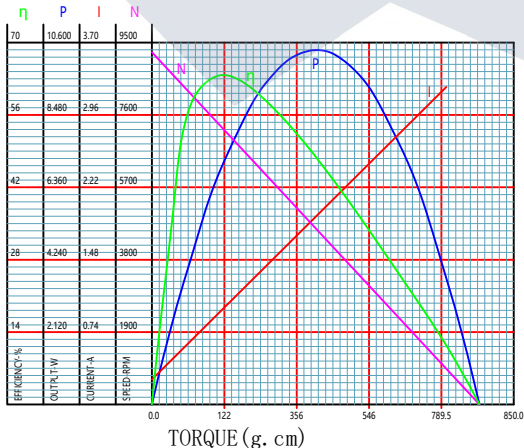

FABL2847-V3 24V

