

FABL3650 | 5W~40 W | Weight: 180g (APPROX)


Rated Voltage from 6V to 30VDC, Speed, torque, etc. free customization.

·典型应用 Typical Use


个人护理(Personal Care)
家用电器(Home Application)
电动工具(Power Tools)
商业设备(Business Equipment)
医疗器械(Medical Apparatus)

·连接端口 Connector Interface

Number	Function
1	VCC
2	FG
3	CW/CCW
4	GND
5	PWM
6	BRAKE

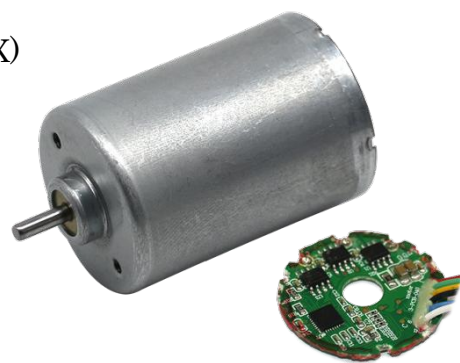

DIRECTION OF ROTATION

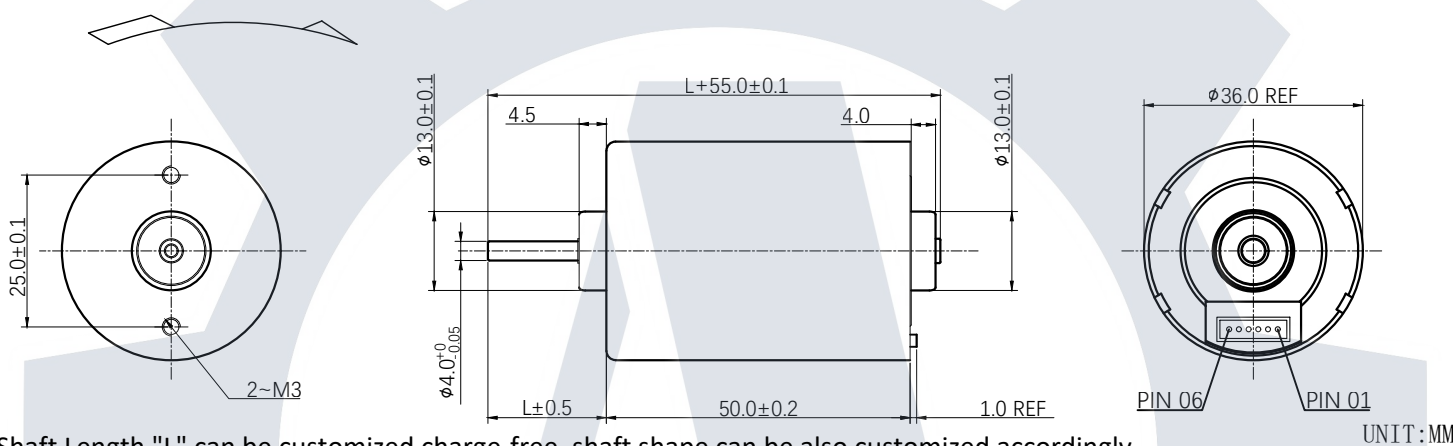

Shaft Length "L" can be customized charge-free, shaft shape can be also customized accordingly.

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL	
	OPERATING RANGE	RATED	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	TORQUE	CURRENT
			r/min	A	r/min	A	g. cm	W	g. cm	A
FABL3650-V1	8V~16V	12V	4304	0.28	3486	1.197	211.2	7.586	1116.6	5.104
FABL3650-V2	8V~26V	18V	6693	0.3	5555	1.552	305.9	17.43	1799.5	7.537
FABL3650-V3	8V~26V	24V	8458	0.4	6851	1.794	395.2	27.77	2079.8	7.628

