

FABL3626 | 2W~16 W | Weight: 95g (APPROX)


Rated Voltage from 6V to 30VDC, Speed, torque, etc. free customization.

·典型应用 Typical Use




个人护理(Personal Care)
家用电器(Home Application)
电动工具(Power Tools)
商业设备(Business Equipment)
医疗器械(Medical Apparatus)

·连接端口 Connector Interface

Number	Function
1	VCC
2	FG
3	CW/CCW
4	GND
5	PWM
6	BRAKE

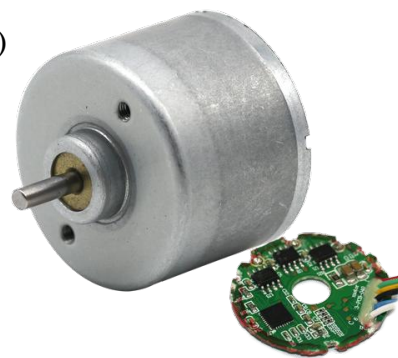

DIRECTION OF ROTATION

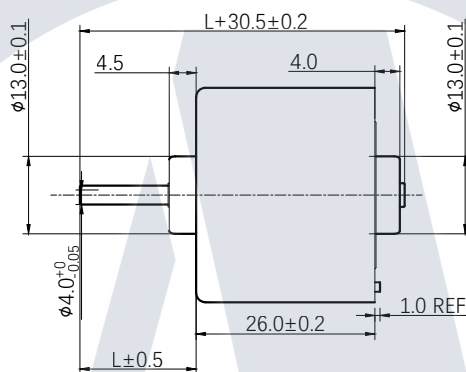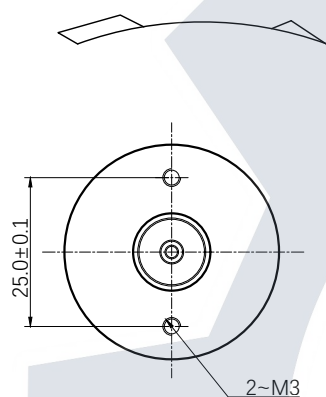

UNIT:MM

Shaft Length "L" can be customized charge-free, shaft shape can be also customized accordingly.

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL	
	OPERATING RANGE	RATED	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	TORQUE	CURRENT
			r/min	A	r/min	A	g. cm	W	g. cm	A
FABL3626-V1	8V~16V	12V	6027	0.15	4882	0.638	96.1	4.814	506	2.721
FABL3626-V2	8V~26V	18V	7435	0.124	6022	0.504	91.0	5.621	478.9	2.121
FABL3626-V3	8V~26V	24V	8927	0.111	7231	0.456	91.3	6.774	480.8	1.926

