

FABL4235 | 5W~35 W | Weight: 160g (APPROX)


Rated Voltage from 6V to 30VDC, Speed, torque, etc. free customization.

·典型应用 Typical Use


个人护理(Personal Care)
家用电器(Home Application)
电动工具(Power Tools)
商业设备(Business Equipment)
医疗器械(Medical Apparatus)

·连接端口 Connector Interface

Number	Function
1	VCC
2	FG
3	CW/CCW
4	GND
5	PWM
6	BRAKE

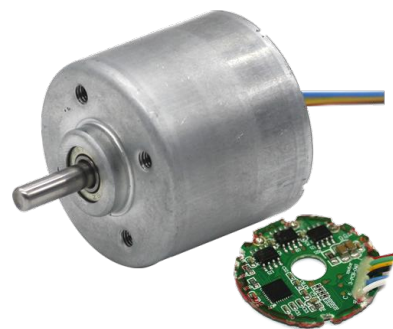

DIRECTION OF ROTATION

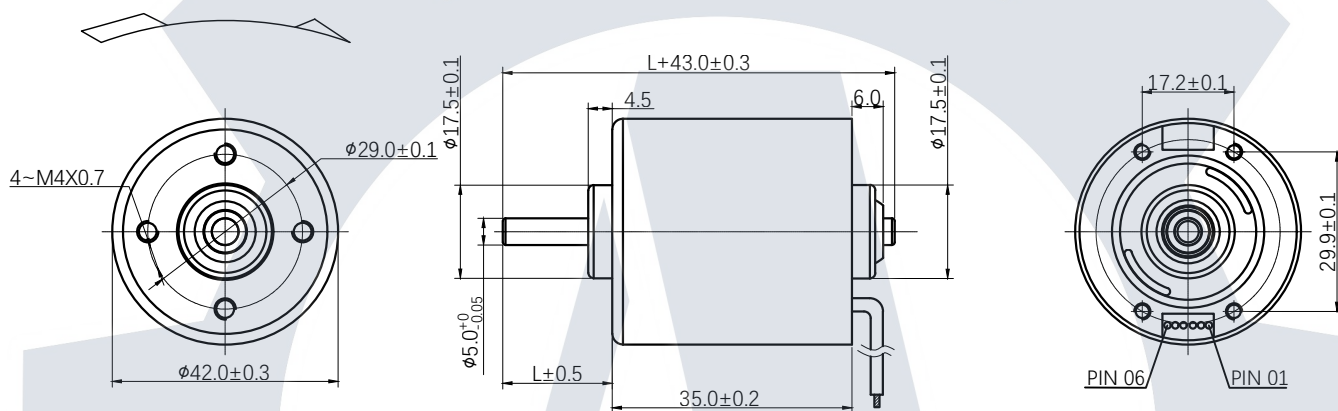


Shaft Length "L" can be customized charge-free, shaft shape can be also customized accordingly.

UNIT: MM

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY		STALL	
	OPERATING RANGE	RATED	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT
			r/min	A	r/min	A	g. cm	W
FABL4235-V1	8V~16V	12V	2860	0.21	2288	0.874	282.5	6.629
FABL4235-V2	8V~26V	18V	4290	0.25	3518	1.127	381.3	13.76
FABL4235-V3	8V~26V	24V	5200	0.30	4160	1.214	457.1	19.51
							2285.7	4.871

FABL4235-V1

12V

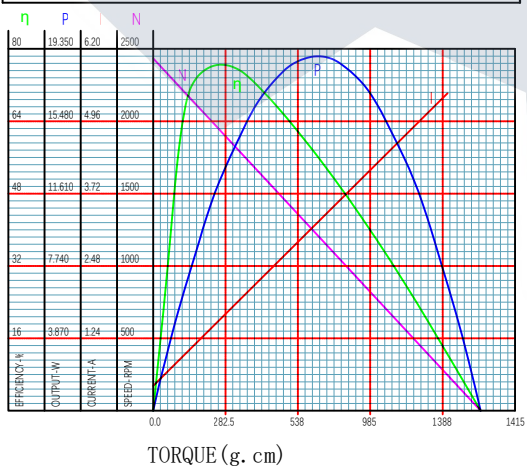

FABL4235-V3

24V

