

FABL4260 | 10W~78 W | Weight: 295g (APPROX)

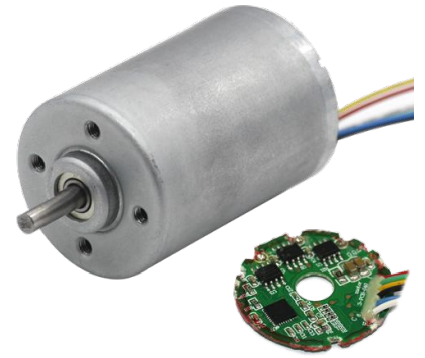
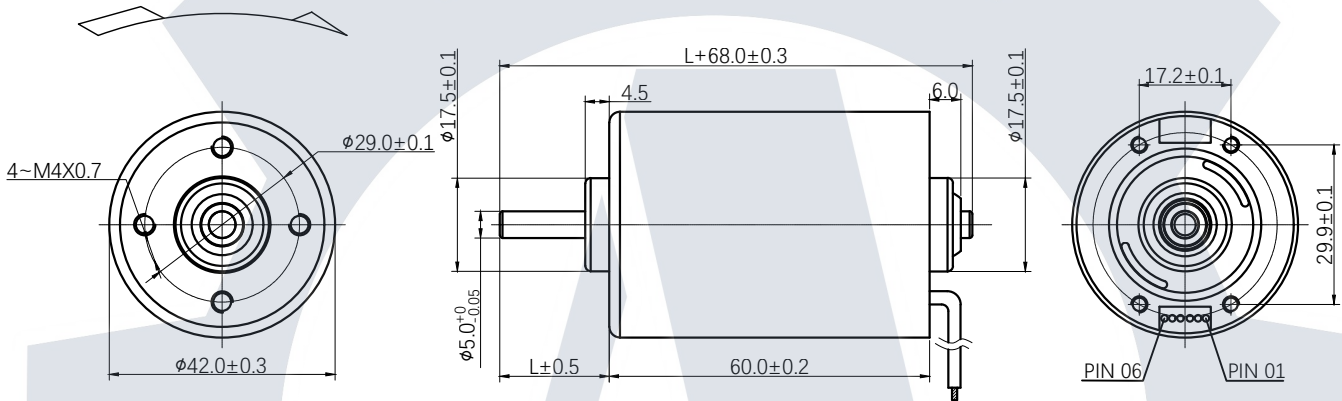
Rated Voltage from 6V to 30VDC, Speed, torque, etc. free customization.

·典型应用 Typical Use

个人护理(Personal Care)
家用电器(Home Application)
电动工具(Power Tools)
商业设备(Business Equipment)
医疗器械(Medical Apparatus)

·连接端口 Connector Interface

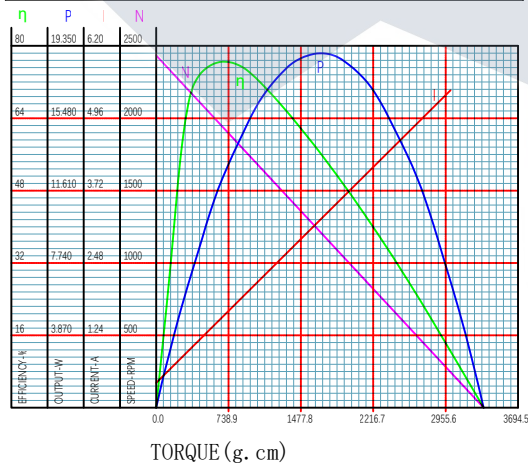
Number	Function
1	VCC
2	FG
3	CW/CCW
4	GND
5	PWM
6	BRAKE


DIRECTION OF ROTATION


Shaft Length "L" can be customized charge-free, shaft shape can be also customized accordingly.

UNIT: MM

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY		STALL			
	OPERATING RANGE	RATED	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	TORQUE	CURRENT
			r/min	A	r/min	A	g. cm	W	g. cm	A
FABL4260-V1	8V~16V	12V	2038	0.15	1773	0.934	480.3	8.734	3694.3	6.184
FABL4260-V2	8V~26V	18V	3690	0.20	3284	1.564	654.7	22.05	5951.6	12.60
FABL4260-V3	8V~26V	24V	4280	0.20	3766	1.567	766.6	29.62	6388.1	11.59

FABL4260-V1 12V

FABL4260-V3 24V
