

FABL5285

 | 25W~160 W | Weight: 650g (APPROX)

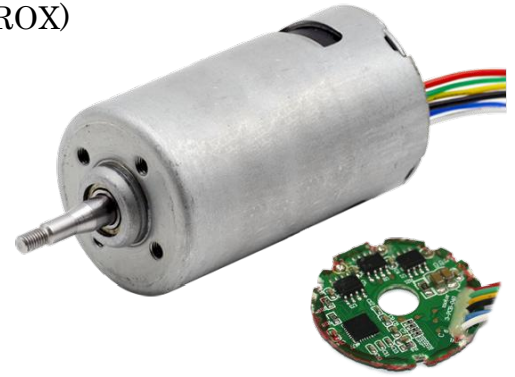
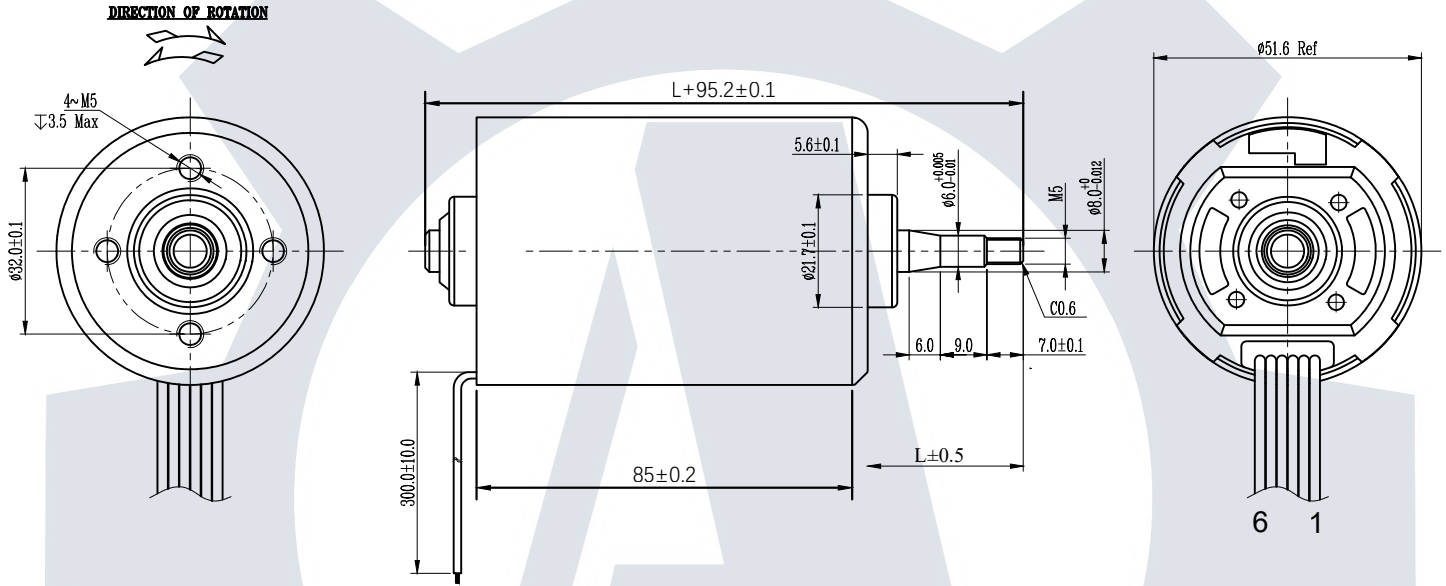
Rated Voltage from 6V to 30VDC, Speed, torque, etc. free customization.

典型应用 Typical Use

| |
|--------------------------|
| 个人护理(Personal Care) |
| 家用电器(Home Application) |
| 电动工具(Power Tools) |
| 商业设备(Business Equipment) |
| 医疗器械(Medical Apparatus) |

连接端口 Connector Interface

| Number | Function |
|--------|----------|
| 1 | VCC |
| 2 | FG |
| 3 | CW/CCW |
| 4 | GND |
| 5 | PWM |
| 6 | BRAKE |


外形尺寸 DIMENSION


Shaft Length "L" can be customized charge-free, shaft shape can be also customized accordingly.

UNIT: MM

| Model | VOLTAGE | | NO LOAD | | AT MAXIMUM EFFICIENCY | | | | | STALL | | |
|--------------|-----------------|-------|---------|---------|-----------------------|---------|---------|--------|--------|---------|--------|---------|
| | OPERATION RANGE | RATED | SPEED | CURRENT | SPEED | CURRENT | TORQUE | | OUTPUT | TORQUE | | CURRENT |
| | V | | RPM | A | RPM | A | g·cm | mN·m | W | g·cm | mN·m | A |
| FABL5285-S01 | 8-26 | 24 | 7930 | 0.71 | 6771 | 4.14 | 1195.20 | 117.13 | 83.10 | 8180.40 | 801.69 | 24.19 |

